

# Technical Data Series

## Tech 403 Sound (STC) Assemblies



**The MPI Group, LLC**

319 North Hills Road, Corbin, Kentucky 40701

[www.metalproductsinc.com](http://www.metalproductsinc.com)

606-523-0461

[support@metalproductsinc.com](mailto:support@metalproductsinc.com)

# Technical Data

## Sound (STC) Assemblies

# Tech 403

## NGP Seal Set #N1

### Standards

**ASTM E90-2009** Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions







**ASTM E413-2010** Classification for Rating Sound Insulation


**ASTM E1332-10a** Standard Classification for Rating Outdoor-Indoor Sound

### Seal Package

**NGP #5050** Silicone Bulb Seal (header and jambs)  
**NGP #2525** Silicone Bulb Seal (header and jambs)  
**NGP #312V X 131N** Acoustical Door Shoe (bottom of door)  
**NGP #60FP** Acoustical Foam Corner Pad (bottom corner of frame/floor)  
**NGP #8144S** Threshold (Optional) (floor)

\*NPG = National Guard Products, Inc.

STC 26	18 Gauge (0.042 min) Polystyrene Core Door 4'-0" x 8'-0" Tested Size	
STC 29	16 Gauge (0.053 min) Polystyrene Core Door 4'-0" x 8'-0" Tested Size	
STC 30	18 Gauge (0.053 min) Polyurethane Core Door 3'-0" x 7'-0" Tested Size	
STC 33	18 Gauge (0.042 min) Steel Stiffened Core Door 3'-0" x 7'-0" Tested Size	
STC 33	16 Gauge (0.053 min) Steel Stiffened Core Door 4'-0" x 8'-0" Tested Size	
STC 33	14 Gauge (0.067 min) Steel Stiffened Core Door 4'-0" x 8'-0" Tested Size	

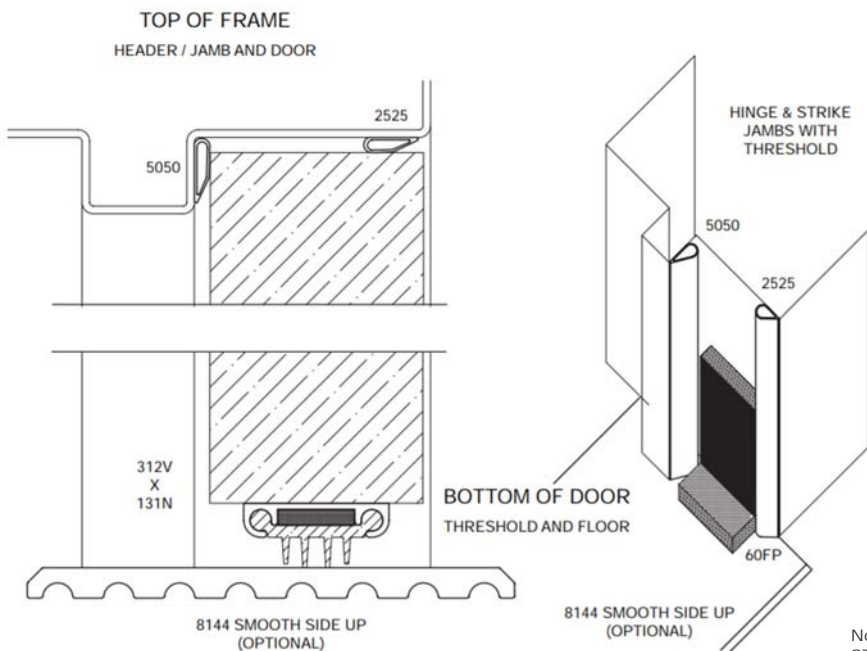

No recorded sound loss up to STC 33  
 STC ratings based on testing and evaluations.  
 Testing and data collection by Intertek Testing Services